

600x  
1200mm

*Collection*



**COLLECTION  
2025**



## WHY CHOOSE US

we are committed to transforming spaces with exceptional tile solutions. Here's why partnering with us is the right choice:



### Unmatched Quality:

We prioritize excellence by using the finest materials and advanced manufacturing techniques to ensure every tile meets the highest quality standards.



### Innovative Designs:

Our collection is inspired by global trends and crafted with creativity, offering a perfect blend of aesthetics and functionality.



### Wide Range of Options:

Whether you're looking for sleek, polished surfaces or rustic finishes, we provide an extensive variety of tiles to suit every style and need.



### Sustainability at Heart:

we believe in eco-conscious manufacturing, minimizing environmental impact while delivering superior products.



### Customer-Centric Approach:

We value our clients and offer personalized solutions, ensuring your vision is brought to life with precision and care.



### Trusted Expertise:


With years of industry experience, our team of experts is dedicated to helping you create beautiful and durable spaces.






## PRODUCT RANGE

Our tile collection offers a wide range of sizes, from small formats to large slabs, perfect for any space. Whether for walls, floors, or features, our versatile tiles fit every design need with ease.

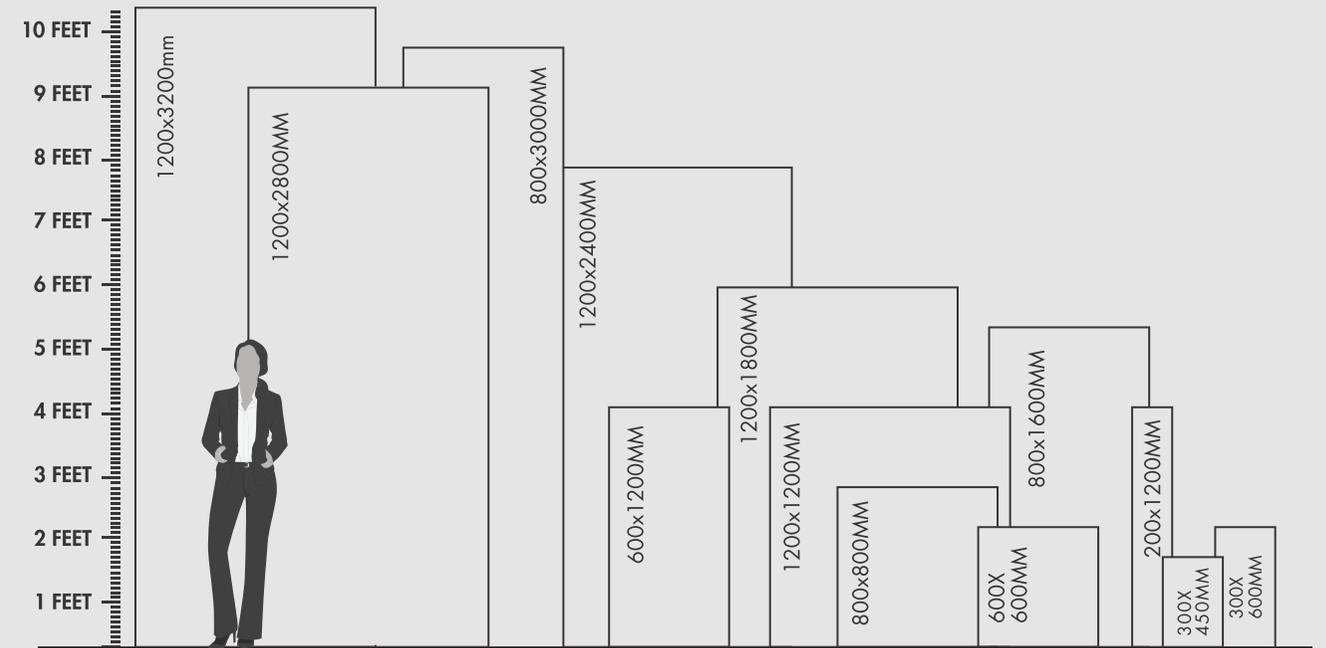

WIDE RANGE OF GVT, PGVT, CERAMIC & PORCELAIN TILES IN MULTIPLE SIZES & FINISHES

- ✓ **PORCELAIN TILES**    ⇄    8MM
- ✓ **SLAB**                    ⇄    6,9,12,15MM
- ✓ **FULL BODY**            ⇄    8.5MM & 15MM
- ✓ **CERAMIC WALL**      ⇄    9MM
- ✓ **CERAMIC FLOOR**    ⇄    8.5MM
- ✓ **DOUBLE CHARGE**    ⇄    8MM



## APPLICATION AREA



INDOOR



OUTDOOR



SWIMMING  
POOL



AIRPORT



UNIVERSITY



HOSPITAL



HOTEL



FIRE EXIT

## TECHNICAL FEATURES



EASY TO  
MAINTAIN



EASY TO  
CLEAN



WATERPROOF



ECOLOGICAL



Frost  
Resistant



STAIN  
RESISTANT




RESISTANT  
TO CHEMICALS



HIGH  
STRENGTH

The selected icon style reflects a modern, minimalistic approach with clean lines and balanced geometry, ensuring clarity and versatility. Each icon is carefully chosen to align with the brand's identity, maintaining consistency across all platforms. The simplicity in design enhances readability at any size, while the unified style ensures visual harmony in both digital and print applications. This thoughtful selection supports effective communication and strengthens brand recognition.



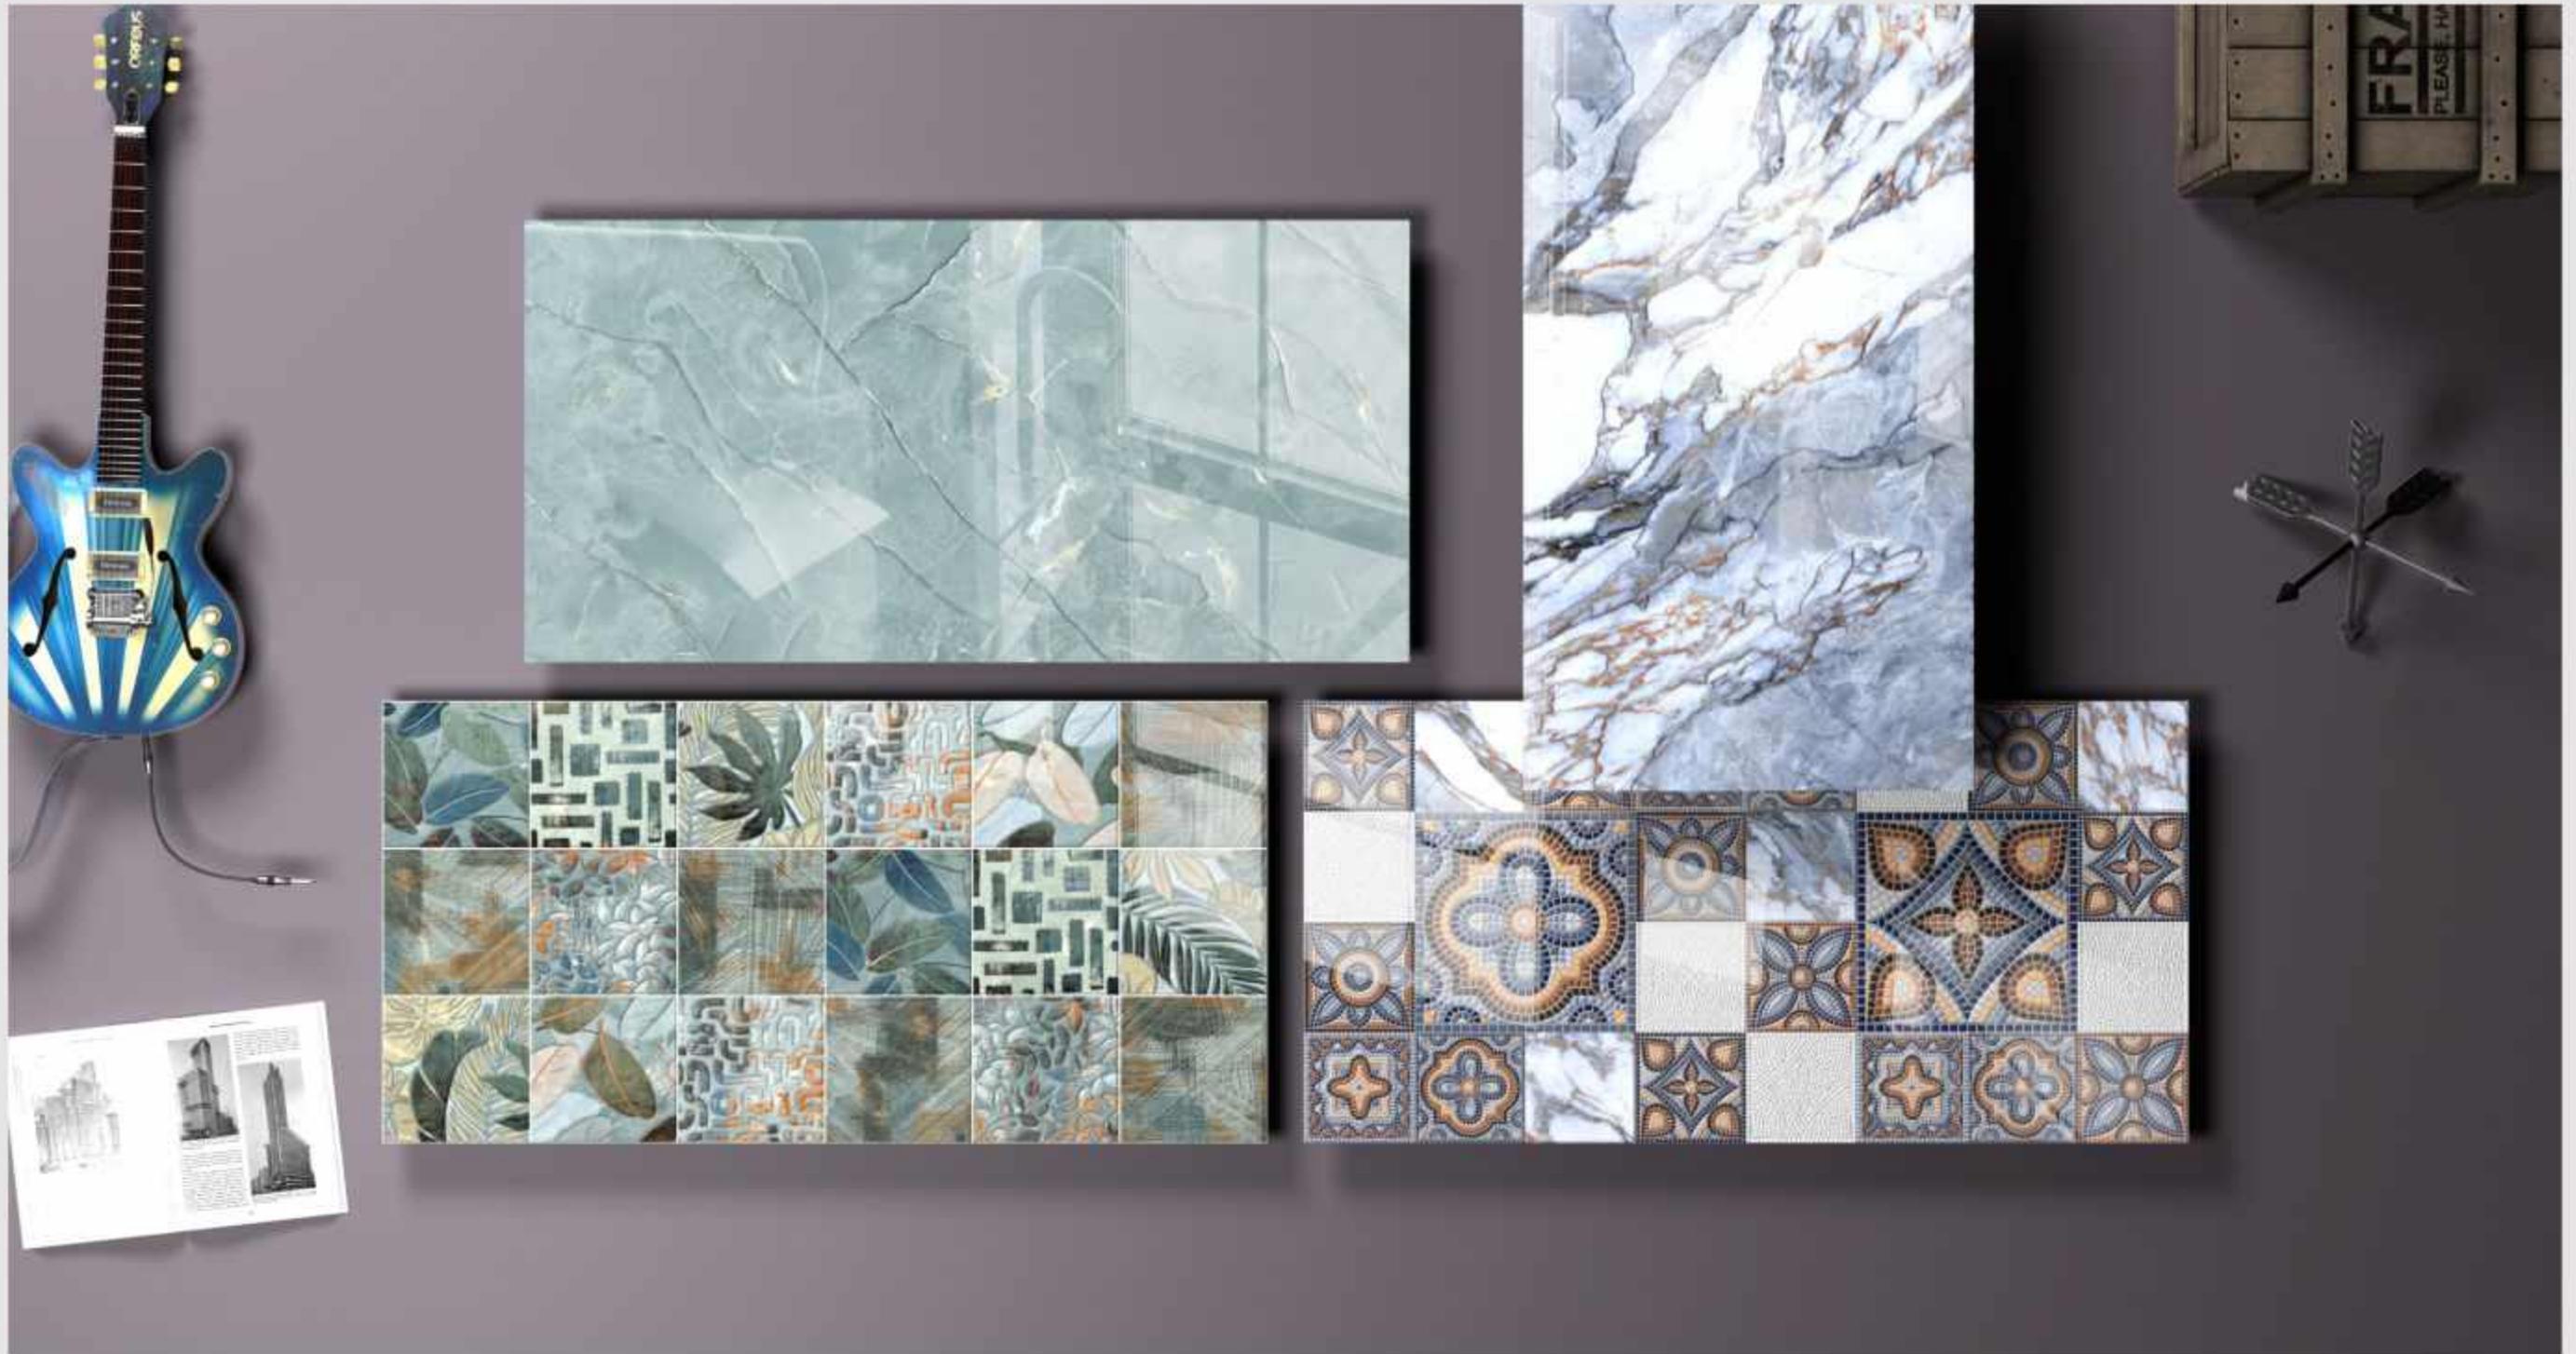

Sinker tiles offer a sleek, polished look that enhances colors and reflects light, creating a spacious, luxurious feel. Durable and easy to clean, they're perfect for stylish floors and walls in both homes and businesses.



# Index



202 DARK



202 DECOR 1



202 DECOR 2



202 LIGHT



204 DECOR 1



204 DECOR 2



205 DECOR



205 LIGHT





204 LIGHT



216



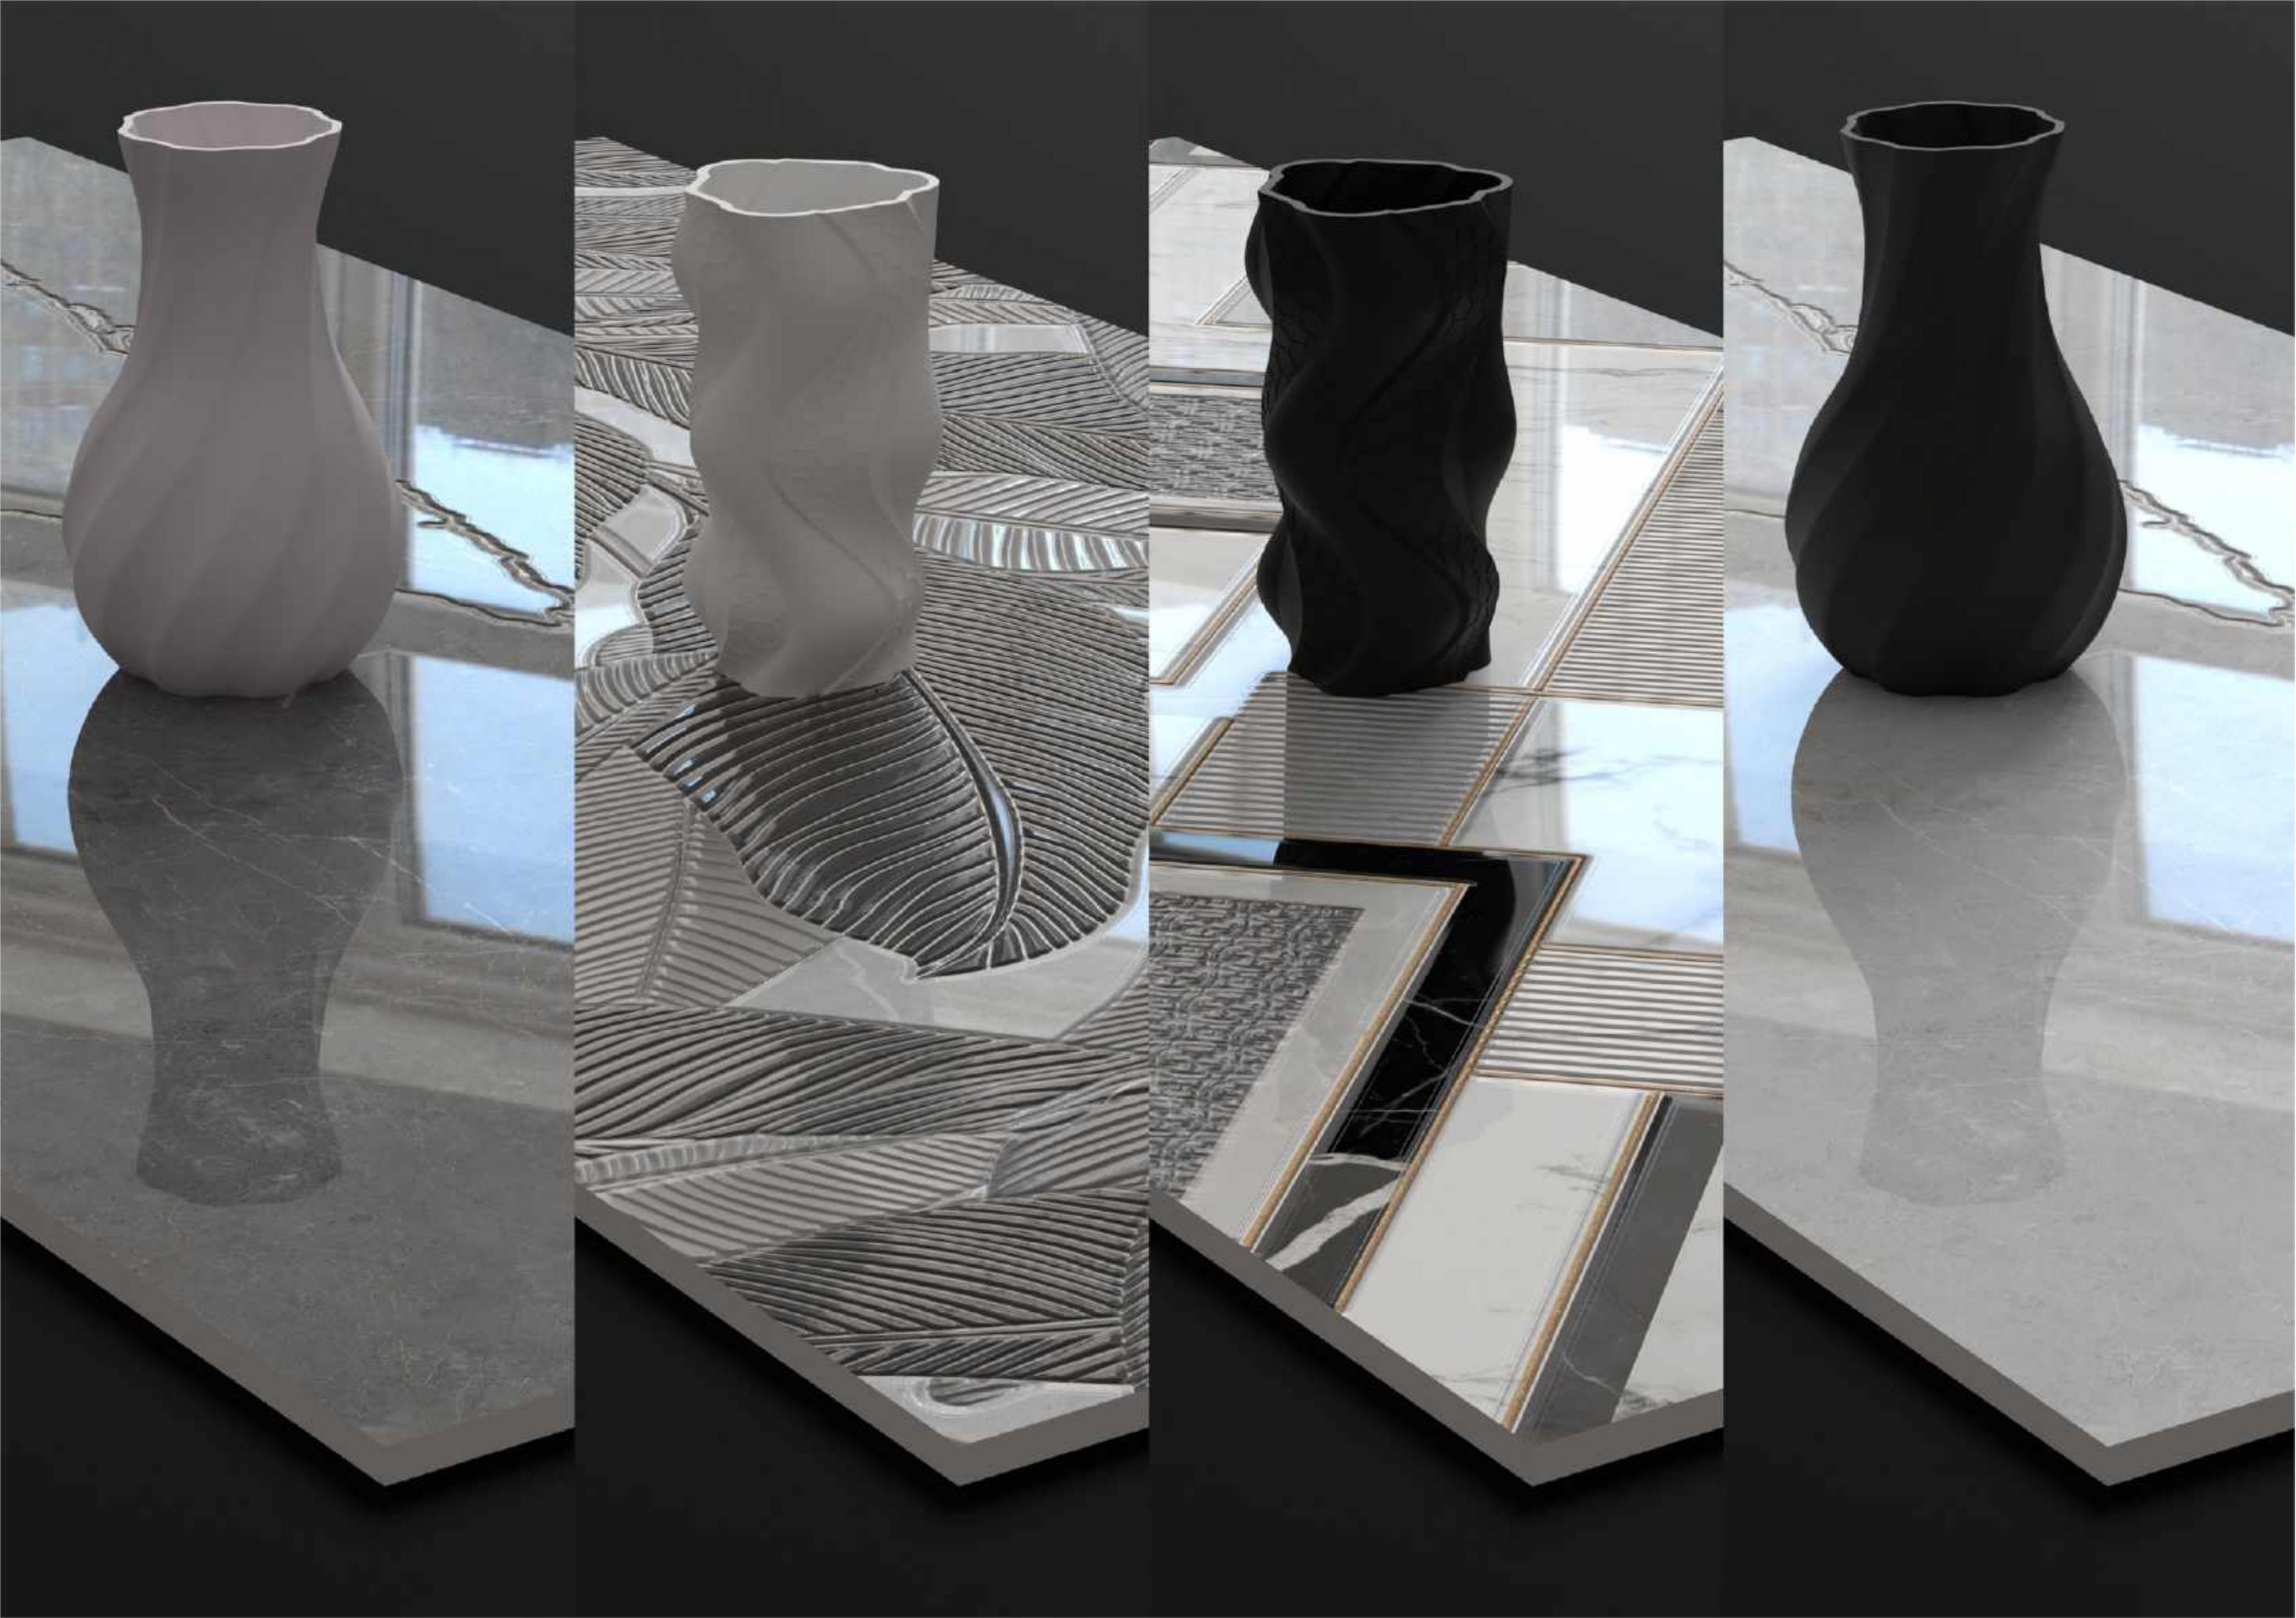



**202 DARK**




Random  
**1**

**202 DECOR 1**



Random  
**1**

**202 DECOR 2**

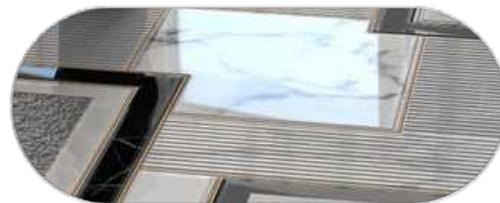

Random  
**1**


**202 LIGHT**



Random  
**1**

Size
<b>600x 1200mm</b>
Finish
<b>High Glossy</b>
Thickness
<b>8.5mm</b>





**204 DECOR 1**



Random

**1**

**204 DECOR 2**



Random

**1**

**205 DECOR**



Random


**1**


Size  
**600x 1200mm**

Finish  
**High Glossy**

Thickness  
**8.5mm**

[← BACK](#)

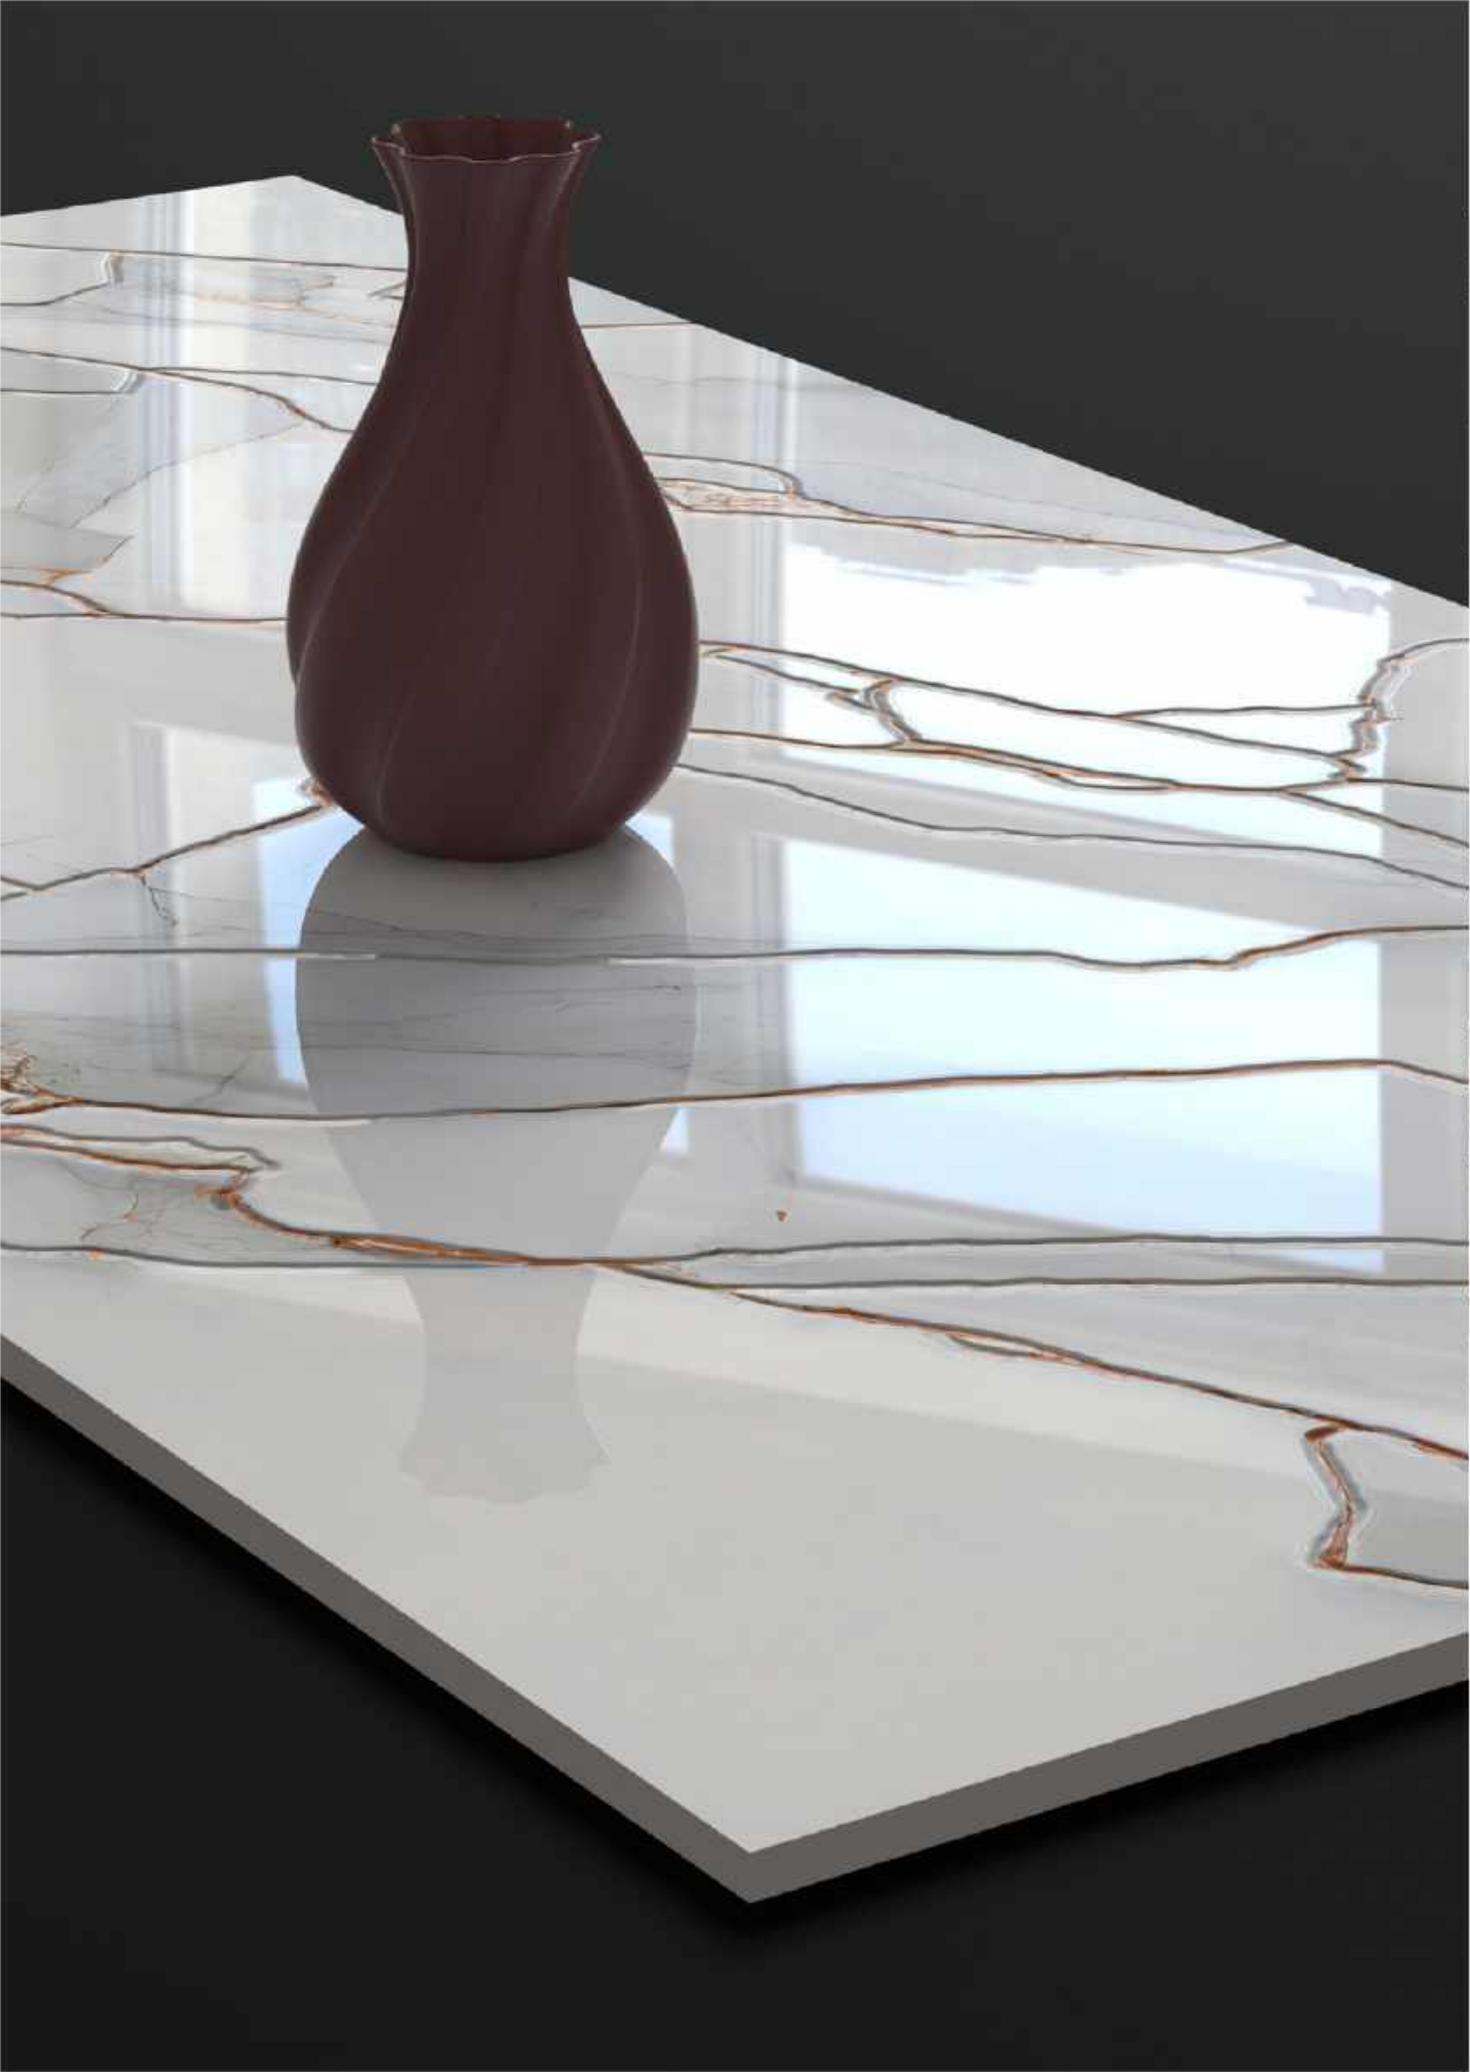




**205 LIGHT**



Random

**1**

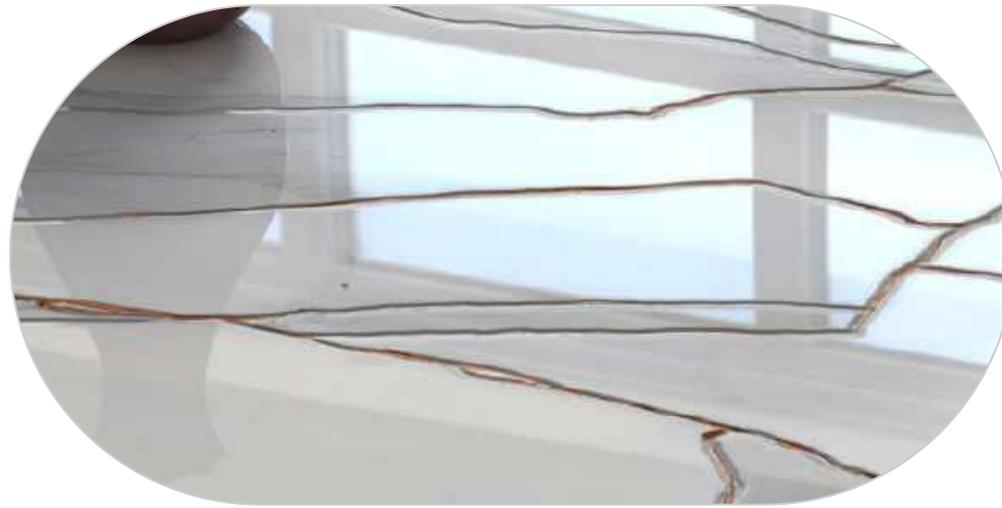

**204 LIGHT**




Random


**1**

Size  
**600x 1200mm**



Finish  
**High Glossy**

Thickness  
**8.5mm**

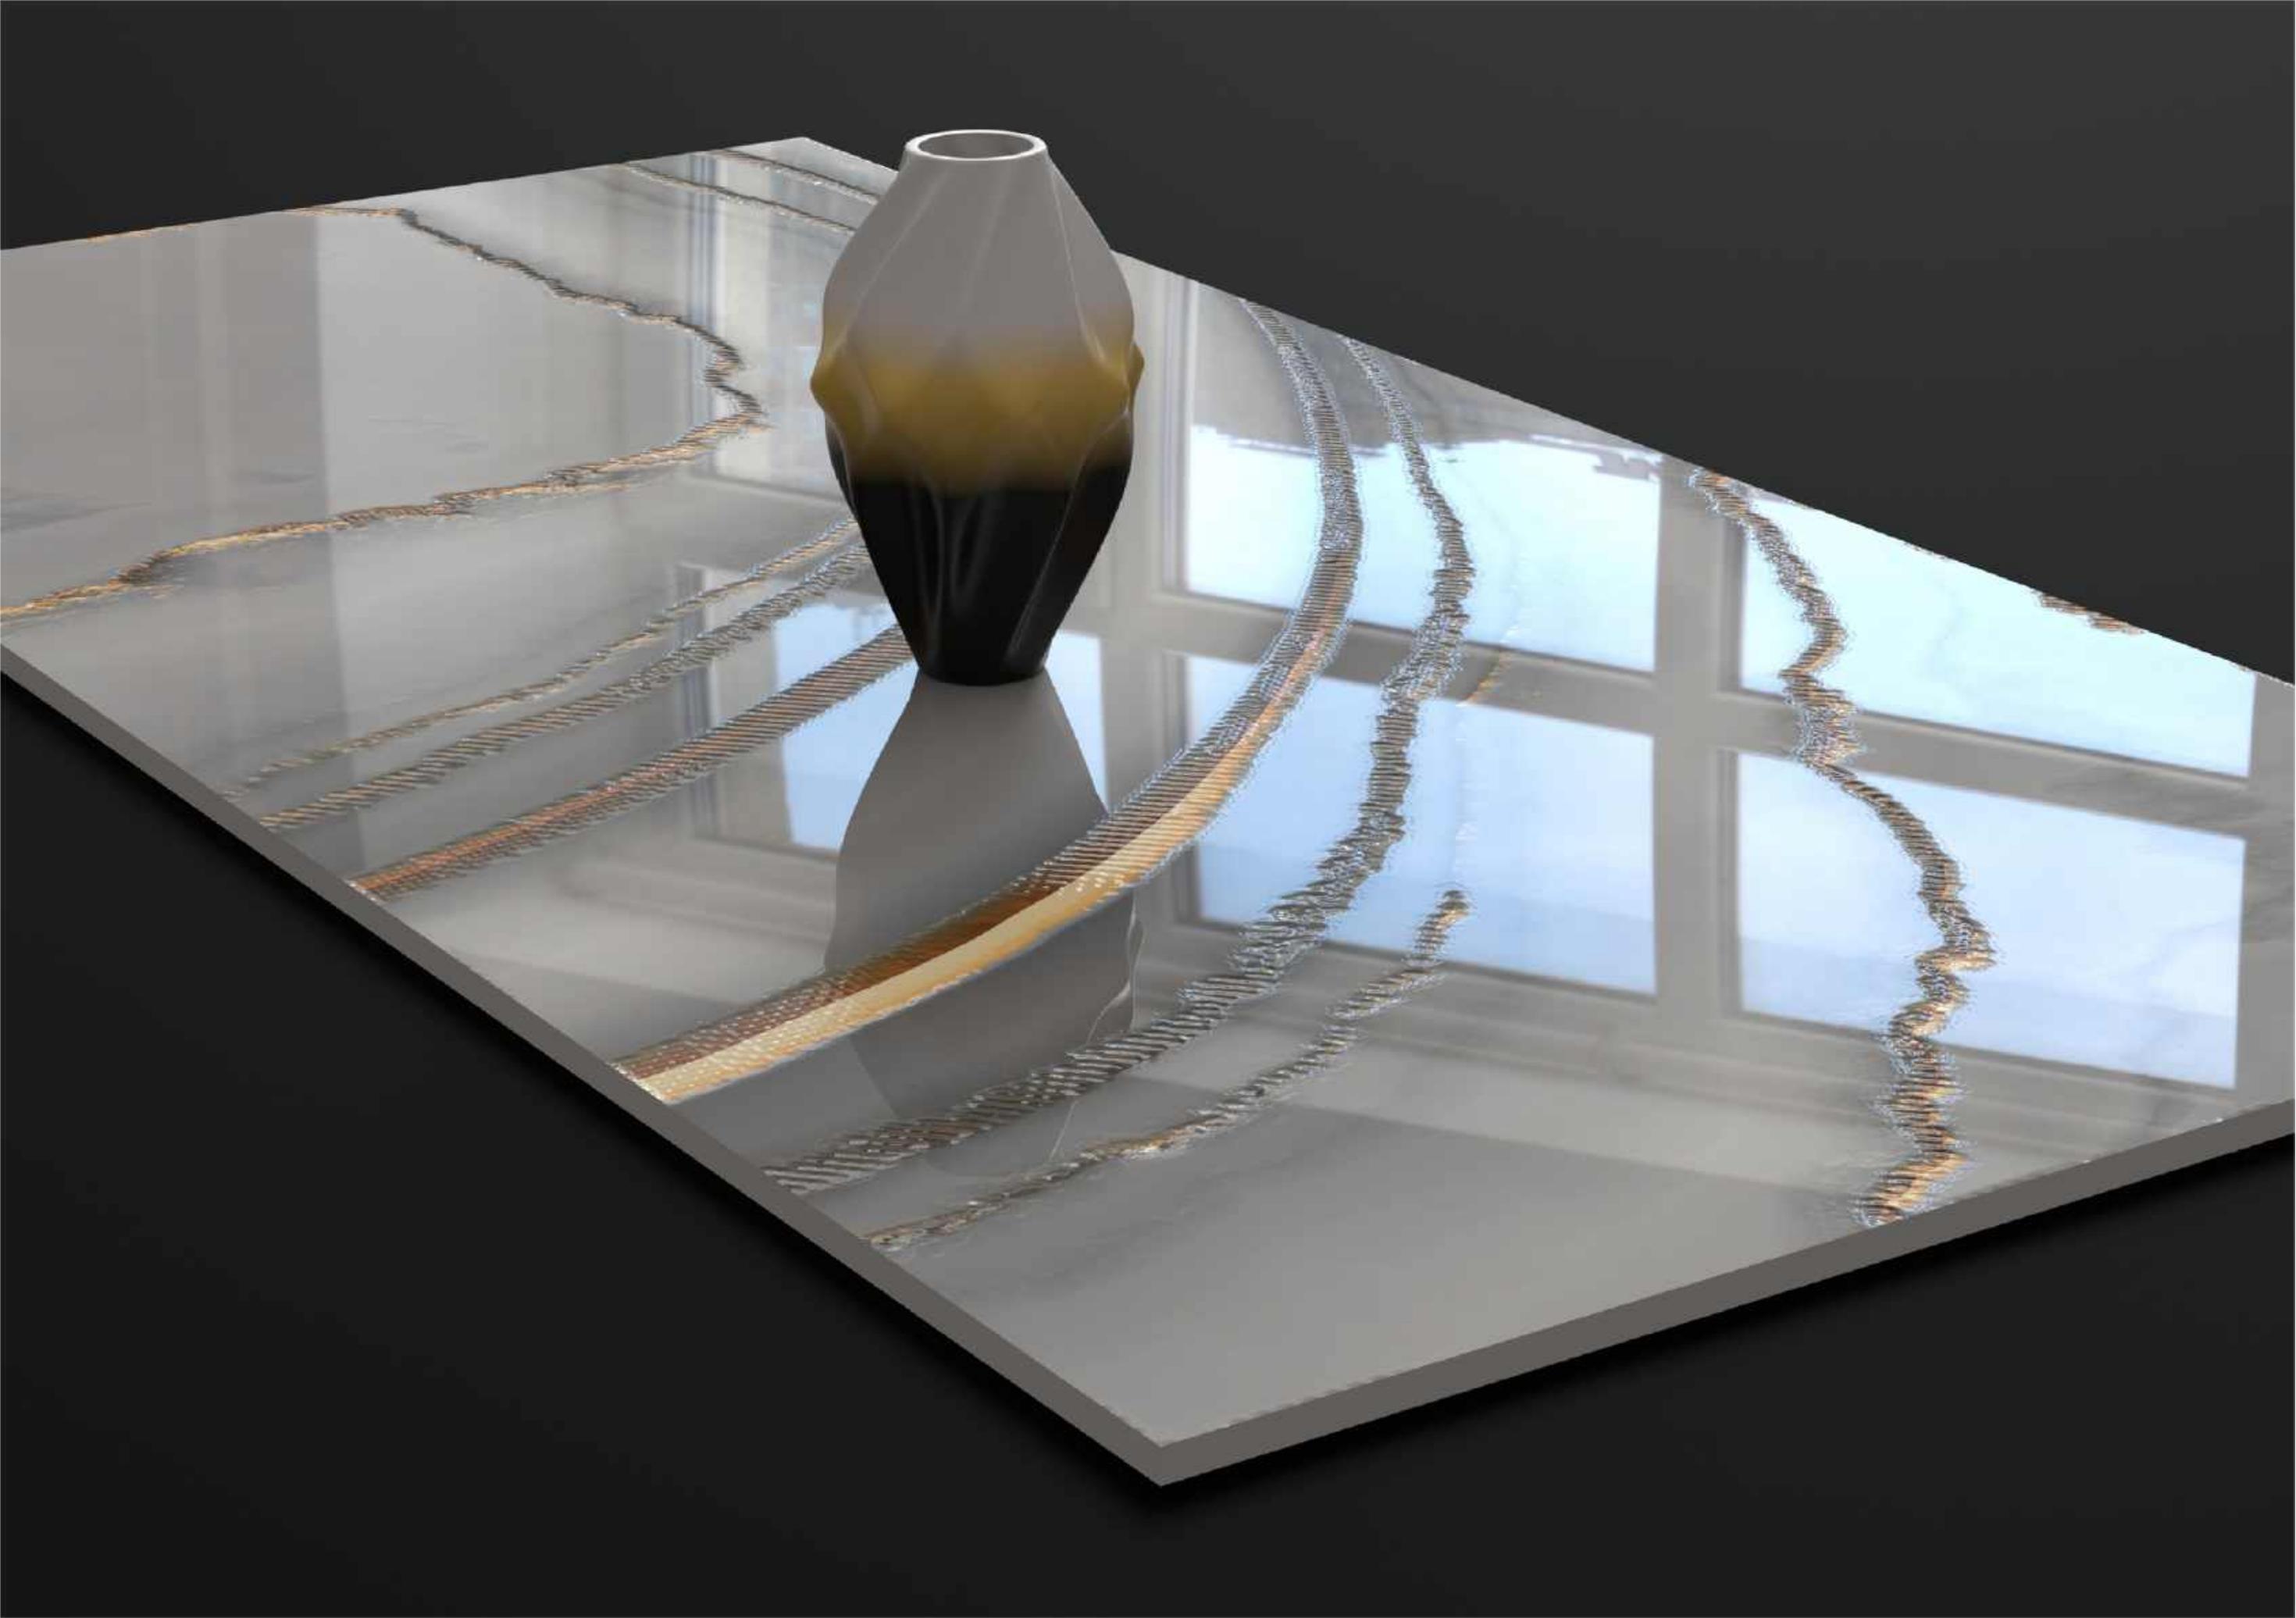



216

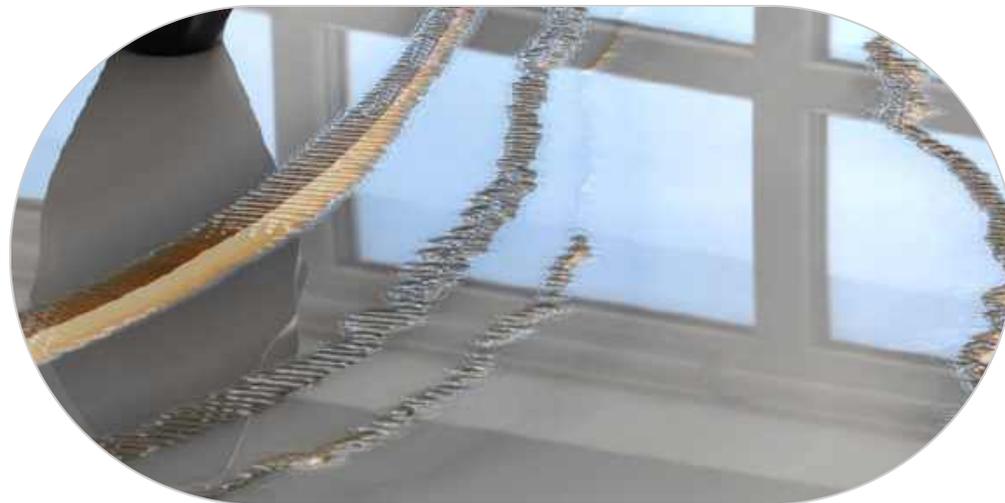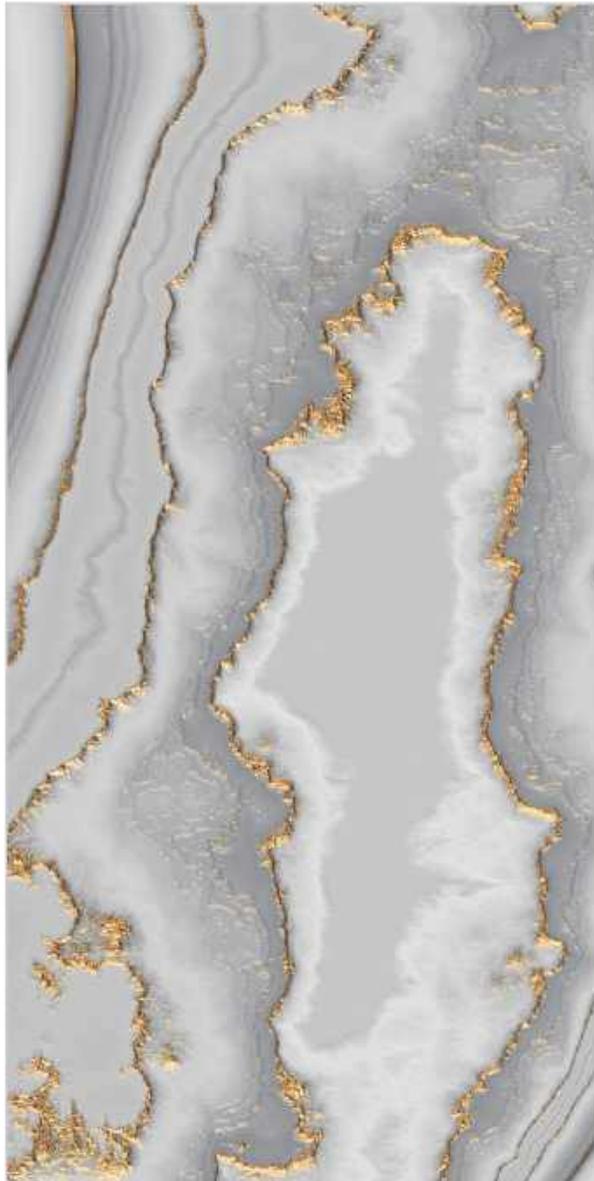

Size  
**600x 1200mm**

Finish  
**High Glossy**

Thickness  
**8.5mm**

Random

**3**

# TECHNICAL FEATURES


CHARACTERISTICS	INTERNATIONAL STANDARD ISO 13006:2012/EN14411 Group BIA	OUR MEAN VALUE	TEST METHOD
<b>Dimension &amp; Surface Quality</b>			
Length	± 0.60 %	± 0.10 %	ISO 10545-2
Thickness	± 5.00 %	± 3.00 %	ISO 10545-2
Straightness in side	± 0.50 %	± 0.10 %	ISO 10545-2
Rectangularity	± 0.50 %	± 0.10 %	ISO 10545-2
Surface flatness	± 0.50 %	± 0.510 %	ISO 10545-2
Surface quality	Declared by Manu.	95-105 %	ISO 2813(Gloss Meter)
Glossiness (only Polished Products)	Min. 95% Tile Should Be Free From Defects	Min. 98% Tile Should Be Free From Defects	ISO 10545-2
<b>Physical Characteristics</b>			
Water absorption	E ≤0.5 %	E ≤0.5 %	ISO 10545-3
MOH'S hardness	≤ 6	≤ 6	ISO 10545-3
Moisture expansion	Nil	Nil	ISO 10545-10
Abrasion resistance	Declared by Manu.	Pei 3-5 (Declared on product)	ISO 10545-7
<b>Mechanical Characteristics</b>			
Flexural strength(MOR)	≥35N/mm <sup>2</sup> (350kg/cm <sup>2</sup> )	≥37N/mm <sup>2</sup> (370kg/cm <sup>2</sup> )	ISO 10545-4
Breaking strength	1300 Newton	2000 Newton	ISO 10545-4
Impact resistance	Declared by Manu.	No indentation or cracking	ISO 10545-5
<b>Safety Characteristics</b>			
Skid resistance (Dynamic Friction Coefficient)	≥ 0.4	≥ 0.4	ISO 10545-17 DIN 51082
Density	≥ 2.0 gm/cc	≥ 2.3 gm/cc	
<b>Thermo Photo Characteristics</b>			
Thermal shock resistance	Resistant to 10 cycles	Pass Min. 10 cycles	ISO 10545-9
Frost resistance	Frost Proof	Need to comply with the standard	ISO 10545-12
Coefficient of Linear thermal Expansion	9x10 <sup>-6</sup> K-1	<5.86x10 <sup>-6</sup> K-1	ISO 10545-8
Color resistance to UV light	Resistant	Resistant	ISO 10545-16
<b>Chemical Characteristics</b>			
Chemical resistance: House Hold Chemicals & Swimming Pool Salts	Min. Class - GB	Confirm to Classes - GA	ISO 10545-13
Chemical resistance: Low Concentrations Acids & Alkalis	Min. Class - GIB	Confirm to Classes - GIA	ISO 10545-13
Chemical resistance: High Concentrations Acids & Alkalis	Min. Class - GHB	Confirm to Classes - GHA	ISO 10545-13
Stain resistance	Min. Class - 3	Min. Confirm to Class - 4	ISO 10545-14

## 600x1200mm Packing Details

SLAB/BOX	2 Pcs
COVERAGE AREA / BOX	1.44 Sq.mtr.
WEIGHT/BOX(APPROX)	27 kg

## Note:

Certain amount of size and shade variation is inherent in all ceramic

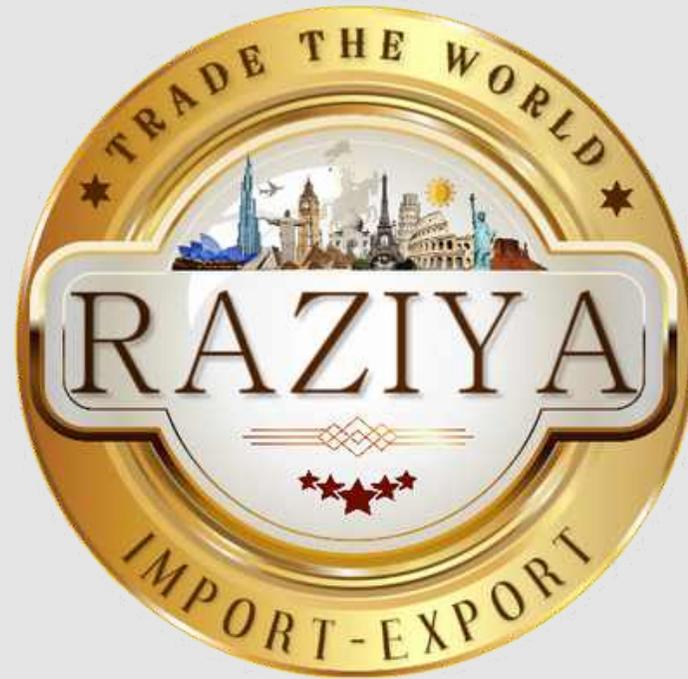

# Thank You

RAZIYA

Import-Export

Dhanori, Pune (MH) INDIA

411015

+91 940 557 87 57

[www.raziyaimportexport.com](http://www.raziyaimportexport.com)

Email: [raziyaimportexport@gmail.com](mailto:raziyaimportexport@gmail.com)